(54) Title: PARAMETRIC MULTI-CHANNEL AUDIO REPRESENTATION
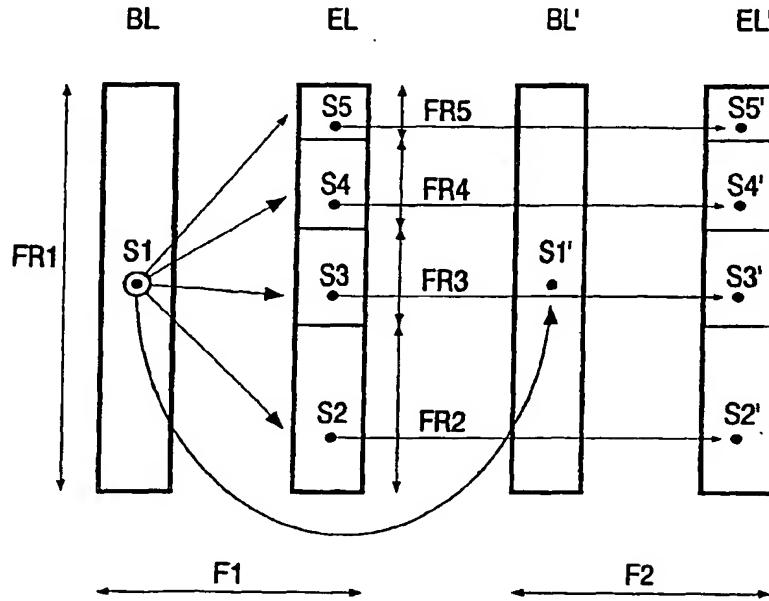
(57) Abstract: Multi-channel audio signals are coded into a monaural audio signal and information allowing to recover the multi-channel audio signal from the monaural audio signal and the information. The information is generated by determining a first portion of the information for a first frequency region of the multi-channel audio signal, and by determining a second portion of the information for a second frequency region of the multi-channel audio signal. The second frequency region is a portion of the first frequency region and thus is a sub-range of the first frequency region. The information is multi-layered enabling a scaling of the decoding quality versus bit rate.

SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Parametric multi-channel audio representation

The invention relates to a method of encoding a multi-channel audio signal, an encoder for encoding a multi-channel audio signal, an apparatus for supplying an audio signal, an encoded audio signal, a storage medium on which the encoded audio signal is stored, a method of decoding an encoded audio signal, a decoder for decoding an encoded
5   audio signal, and an apparatus for supplying a decoded audio signal.

EP-A-1107232 discloses a parametric coding scheme to generate a representation of a stereo audio signal which is composed of a left channel signal and a right
10   channel signal. To efficiently utilize transmission bandwidth, such a representation contains information concerning only a monaural signal which is either the left channel signal or the right channel signal, and parametric information. The other stereo signal can be recovered based on the monaural signal together with the parametric information. The parametric information comprises localization cues of the stereo audio signal, including intensity and
15   phase characteristics of the left and the right channel.

It is an object of the invention to provide a parametric multi-channel audio system which is able to scale the quality of the encoded audio signal with the available bit
20   rate or to scale the quality of the decoded audio signal with the complexity of the decoder or the available transmission bandwidth.

A first aspect of the invention provides a method of encoding a multi-channel audio signal as claimed in claim 1. A second aspect of the invention provides a method of encoding a multi-channel audio signal as claimed in claim 2. A third aspect of the invention
25   provides an encoder for encoding a multi-channel audio signal as claimed in claim 14. A fourth aspect of the invention provides an encoder for encoding a multi-channel audio signal as claimed in claim 15. A fifth aspect of the invention provides an apparatus for supplying an audio signal as claimed in claim 16. A sixth aspect of the invention provides an encoded audio signal as claimed in claim 17. A seventh aspect of the invention provides a storage

medium on which the encoded signal is stored is claimed in claim 18. An eight aspect of the invention provides a method of decoding as claimed in claim 19. A ninth aspect of the invention provides a decoder for decoding an encoded audio signal as claimed in claim 20. A tenth aspect of the invention provides an apparatus for supplying a decoded audio signal as
5   claimed in claim 21. Advantageous embodiments are defined in the dependent claims.

In the method of encoding a multi-channel audio signal in accordance with the first aspect of the invention, a single channel audio signal is generated. Further, information is generated from the multi-channel audio signal allowing recovering, with a required quality level, the multi-channel audio signal from the single channel audio signal and the
10   information. Preferably, the information comprises sets of parameters, for example, as known from EP-A-1107232.

In accordance with the first aspect of the invention, the information is generated by determining a first portion of the information for a first frequency region of the multi-channel audio signal, and by determining a second portion of the information for a
15   second frequency region of the multi-channel audio signal. The second frequency region is a portion of the first frequency region and thus is a sub-range of the first frequency region. Now, two levels of quality of decoding are possible. For a low quality level of the decoded multi-channel audio signal, the decoder uses the encoded single channel audio signal, and the first portion of the information. For a higher quality level, the decoder uses the encoded
20   single channel audio signal, and both the first and the second portion of the information. Of course, it is possible to select the decoding quality out of a multitude of levels if a multitude of portions of information each being associated with a different frequency region are present. For example, the first portion may comprise a single set of parameters determined within a frequency region which covers the full bandwidth of the multi-channel audio signal.
25   And the second portion may comprise several sets of parameters, each set of parameters being determined for a sub-range or portion of the full bandwidth. Together, the portions preferably cover the full bandwidth. But many other possibilities exist. For example, the first portion may comprise two sets of parameters, the first set being determined for a frequency region which covers a lower part of the full bandwidth, and the second set being determined
30   for a frequency region covering the other part of the full bandwidth. The second portion may comprise two sets of parameters determined for two frequency regions within the lower part of the full bandwidth. It is not required that the number of sets of parameters for the lower part and the higher part of the full bandwidth are equal.

This representation of the encoded audio signal allows a quality of the decoded audio signal to depend on the complexity of the decoder. For example, in a simple portable decoder a low complexity decoder may be used which has a low power consumption and which is therefore able to use only part of the information. In a high end application, a complex decoder is used which uses all the information available in the coded signal.

The quality of the decoded audio can also depend on the available transmission bandwidth. If the transmission bandwidth is high the decoder can decode all available layers, since they are all transmitted. If the transmission bandwidth is low the transmitter can decide to only transmit a limited number of layers.

In a second aspect of the invention, the encoder receives a maximum allowable bit rate of the encoded multi-channel audio signal. This maximum allowable bit rate may be defined by the available bit rate of a transmission channel such as Internet, or of a storage medium. In applications wherein the transmission bandwidth is variable and thus the maximum allowable bit rate changes in time, it is important to be able to adapt to these fluctuations of the transmission bandwidth to prevent a very low quality of the decoded audio signal. Normally, the encoder encodes all available layers. It is decided at the transmitting-end what layers to transmit, depending on the available channel capacity. It is possible to do this with the encoder in the loop, but this is more complicated that just stripping some layers prior to transmission.

The encoder only adds the second portion of the information for the second frequency region of the multi-channel audio signal to the encoded audio signal if a bit rate of the encoded multi-channel audio signal which comprises the single channel audio signal, and the first and second portion of the information is not higher than the maximum allowable bit rate. Thus, the second portion is not present in the coded audio signal if the transmission bandwidth is not large enough to support the transmission of the second portion.

In an embodiment as defined in claim 4, the information comprises sets of parameters, each one of the portions of the information is represented by one or more sets of parameters. The number of sets of parameters depending on the number of frequency regions present in the portions of the information.

In an embodiment as defined in claim 6, the sets of parameters comprise at least one of the localization cues.

In an embodiment as defined in claim 7, the first frequency region substantially covers the full bandwidth of the multi-channel audio signal. In this way, one set of parameters suffices to provide the basic information required to decode the single channel

audio signal into the multi-channel audio signal. In this way a basic level of quality of the decoded audio signal is guaranteed. The second frequency range covers part of the full bandwidth. In this way, the second portion when present in the coded audio signal improves the quality of the decoded audio signal in this frequency range.

5   In an embodiment as defined in claim 8, the second portion of the information comprises at least two frequency ranges which together substantially cover the full bandwidth of the multi-channel audio signal. In this way, the quality improvement provided by the second portion is present over the complete bandwidth.

In an embodiment as defined in claim 9, the base layer which comprises the

10   single channel audio signal and the first portion of the information is always present in the encoded audio signal. The enhancement layer which comprises the second portion of the information is encoded only if the bit rate of the encoded audio signal does not exceed the maximally allowable bit rate. In this way, the quality of the decoded audio signal will depend on the maximally allowable bit rate. If the maximally allowable bit rate is too low to

15   accommodate the enhancement layer, the decoded audio signal will be obtained from the base layer which will produce a better quality of the decoded audio than will be the case if unpredictable parts of the coded audio will not reach the decoder.

In the embodiments as defined in any one of the claims 10 to 12, the portions of the information (usually containing sets of parameters, one set for each frequency band

20   represented) in a next frame are coded based on the parameters of the previous frame. Usually, this reduces the bit rate of the encoded portions of the information, because, due to correlation, the information in two successive frames will not differ substantially.

In the embodiments as defined in claim 13, the difference of the parameters of two successive frames is coded instead of the parameters itself.

25   Prior solutions in audio coders that have been suggested to reduce the bit rate of stereo program material include intensity stereo and M/S stereo.

In the intensity stereo algorithm, high frequencies (typically above 5 kHz) are represented by a single audio signal (i.e., mono) combined with time-varying and frequency-dependent scale factors or intensity factors which allow to recover an decoded audio signal

30   which resembles the original stereo signal for these frequency regions. In the M/S algorithm, the signal is decomposed into a sum (or mid, or common) signal and a difference (or side, or uncommon) signal. This decomposition is sometimes combined with principle component analysis or time-varying scale factors. These signals are then coded independently, either by a transform coder or sub-band coder [which are both waveform coders]. The amount of

information reduction achieved by this algorithm strongly depends on the spatial properties of the source signal. For example, if the source signal is monaural, the difference signal is zero and can be discarded. However, if the correlation of the left and right audio signals is low (which is often the case for the higher frequency regions), this scheme offers only little

5   bit rate reduction. For the lower frequency regions M/S coding generally provides significant merit.

Parametric descriptions of audio signals have gained interest during the last years, especially in the field of audio coding. It has been shown that transmitting (quantized) parameters that describe audio signals requires only little transmission capacity to re-

10   synthesize a perceptually equal signal at the receiving end. However, current parametric audio coders focus on coding monaural signals, and stereo signals are processed as dual mono signals.

These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

15

In the drawings:

Fig. 1 shows a block diagram of a multi-channel encoder for stereo audio,

Fig. 2 shows a block diagram of a multi-channel decoder for stereo audio,

20   Fig. 3 shows a representation of the encoded data stream,

Fig. 4 shows an embodiment of the frequency ranges in accordance with the invention,

Fig. 5 shows another embodiment of the frequency ranges in accordance with the invention,

25   Fig. 6 shows the determination of the sets of parameters based on parameters in a previous frame in accordance with an embodiment of the invention,

Fig. 7 shows a set of parameters,

Fig. 8 shows the differential determination of the parameters of the base layer, and

30   Fig. 9 shows the differential determination of the parameters corresponding to a frequency region of an enhancement layer.

Fig. 1 shows a block diagram of a multi-channel encoder. The encoder receives a multi-channel audio signal which is shown as a stereo signal RI, LI and the encoder supplies the encoded multi-channel audio signal EBS.

The down mixer 1 combines the stereo signal or stereo channels RI, LI into a single channel audio signal (also referred to as monaural signal) SC. For example, the down mixer 1 may determine the average of the input audio signals RI, LI.

The encoder 3 encodes the monaural signal SC to obtain an encoded monaural signal ESC. The encoder 3 may be of a known kind, for example, an MPEG coder (MPEG-LII, MPEG-LIII (mp3), or MPEG2-AAC).

The parameter determining circuit 2 determines the sets of parameters S1, S2, ... characterizing the information INF based on the input audio signals RI, LI. Optionally, the parameter determining circuit 2 receives the maximum allowable bit rate MBR to only determine the parameter sets S1, S2, ... which when coded by the parameter coder 4, together with the encoded monaural signal ESC do not exceed the maximum allowable bit rate MBR. The encoded parameters are denoted by EIN.

The formatter 5 combines the encoded monaural signal SC and the encoded parameters EIN in a data stream in a desired format to obtain the encoded multi-channel audio signal EBS.

The operation of the encoder is elucidated in more detail in the now following, by way of example, with respect to an embodiment. The multi-channel audio signal LI, RI is encoded in a single monaural signal SC (further also referred to as single channel audio signal). The parameterization of spatial attributes of the multi-channel audio signals LI, RI is performed by the parameter determining circuit 2. The parameters contain information on how to restore the multi-channel audio signal LI, RI from the monaural signal SC. The parameters are usually encoded by the parameter encoder 4 before combining them with the encoded single monaural signal ESC. Thus, for general audio coding applications, these parameters combined with only one monaural audio signal are transmitted or stored. The combined coded signal is the encoded multi-channel audio signal EBS. The transmission or storage capacity necessary to transmit or store the encoded multi-channel audio signal EBS is strongly reduced compared to audio coders that process the multi-channels independently. Nevertheless, the original spatial impression is maintained by the information INF which contains the (sets of) parameters.

In particular, the parametric description of multi-channel audio RI, LI is related to a binaural processing model which aims at describing the effective signal processing of the binaural auditory system.

The model splits the incoming audio LI, RI into several band-limited signals,
5   which, preferably, are spaced linearly at an ERB-rate scale. The bandwidth of these signals depends on the center frequency, following the ERB-rate. Subsequently, preferably, for every frequency band, the following properties of the incoming signals are analyzed:

- The interaural level difference, or ILD, defined by the relative levels of the band-limited signal stemming from the left and right ears,

10   - The interaural time (or phase) difference ITD (or IPD), defined by the interaural delay (or phase shift) corresponding to the peak in the interaural cross-correlation function, and

- The (dis)similarity of the waveforms that can not be accounted for by ITDs or ILDs, which can be parameterized by the maximum interaural cross-correlation IC (for
15   example, the value of the cross-correlation at the position of the maximum peak).

The sets S1, S2, ... of the three parameters, one set for each frequency band FR1, FR2, ..., vary over time. However, since the binaural auditory system is very sluggish in its processing, the update rate of these properties is rather low (typically tens of milliseconds).

20   It may be assumed that the (slowly) time-varying parameters are the only spatial signal properties that the binaural auditory system has available, and that from these time and frequency dependent parameters, the perceived auditory world is reconstructed by higher levels of the auditory system.

Fig. 2 shows a block diagram of a multi-channel decoder. The decoder
25   receives the encoded multi-channel audio signal EBS and supplies the recovered decoded multi-channel audio signal which is shown as a stereo signal RO, LO.

The deformatter 6 retrieves the encoded monaural signal ESC' and the encoded parameters EIN' from the data stream EBS. The decoder 7 decodes the encoded monaural signal ESC' into the output monaural signal SCO. The decoder 7 may be of any
30   known kind (of course matched to the encoder that has been used), for example, the decoder 7 is an MPEG decoder. The decoder 8 decodes the encoded parameters EIN' into output parameters INO.

The demultiplexer 9 recovers the output stereo audio signals LO and RO by applying the parameter sets S1, S2, ... of the output parameters INO on the output monaural signal SCO.

Fig. 3 shows a representation of the encoded data stream. For example, in each
5   frame F1, F2, ..., the data package starts with a header H followed by the coded monaural signal ECS now indicated by A, a first portion P1 of the encoded information EIN, a second portion P2 of the encoded information EIN, and a third portion P3 of the encoded information EIN.

If the frame F1, F2, ... only comprises the header H and the coded monaural
10   signal ECS, only the monaural signal SC is transmitted.

As disclosed in EP-A-1107232, the full frequency band in which the input audio signal occurs is divided into a plurality of sub-frequency bands, which together cover the full frequency band. In the terminology in accordance with the invention, the multi-channel information INF is encoded in a plurality of parameter sets S1, S2,... one set for each
15   sub-frequency band FR1, FR2, ... This plurality of parameter sets S1, S2,... is coded in the first portion P1 of the encode information EIN. Thus, to transmit a basic level quality multi-channel audio signal, the bit stream comprises the header H, the portion A which is the coded monaural signal ECS and the first portion P1.

In the bit stream in accordance with an embodiment of the invention, the first
20   portion P1 consists of a single set parameters S1, only. The single set being determined for the full bandwidth FR1. This bit stream which comprises the header H and the portions A and P1 provides a basic layer of quality, indicated by BL in Fig. 3.

To support an enhanced quality, further portions P2, P3 of the coded information EIN are present in the bit stream. These further portions form an enhancement
25   layer EL. The bit stream may comprise a single further portion P2 or more than 1 further portion. The further portion P2 preferably comprises a plurality of sets S2, S3,... of parameters, one set for each sub-frequency band FR2, FR3, ..., the sub- frequency bands FR2, FR3, ... preferably covering the full frequency band FR1. The enhanced quality may also be present in a step-wise manner, a first enhancement level is provided by the
30   enhancement layer EL1 which comprises the first portion. And a second enhancement layer EL comprises the first enhancement layer EL1 and the second enhancement layer EL2 which comprises the portion P3.

The further portion P2 may also comprise a single set S2 of parameters corresponding to a single frequency band FR2 which is a sub-band of the full frequency band

FR1. The further portion P2 may also comprise a number of sets of parameters S2, S3, ...
which correspond to frequency bands FR2, FR3, ... which together do not cover the complete
full frequency band FR1.

5   The further portion P3 preferably contains parameter sets for frequency bands
which sub-divide at least one of the sub-bands of the further portion P2.

        This format of the bit stream in accordance with the invention allows at the
transmission channel, or at the decoder to scale the quality of the decoded audio signal with
the bit rate of the transmission channel, or the decoding complexity of the decoder. For
example, if the audio decoder should have a low power consumption, as is important in
10   portable applications, the decoder may have a low complexity and only uses the portions H,
A and P1. It would even be possible that the decoder is able to perform more complex
operations at a higher power consumption if the user indicates that he desires a higher quality
of the decoded audio.

        It is also possible that the encoder is aware of the maximum allowable bit rate
15   MBR which may be transmitted via the transmission channel or which may be stored on a
storage medium. Now, the encoder is able to decide on how many, if any, further portions P1,
P2, ... fit within the maximum allowable bit rate MBR. The encoder codes only these
allowable portions P1, P2, ... in the bit stream.

        Fig. 4 shows an embodiment of the frequency ranges in accordance with the
20   invention. In this embodiment, the frequency band FR1 is equal to the full bandwidth FBW
of the multi-channel audio signal LI, RI, and the frequency band FR2 is a sub-frequency band
of the full bandwidth FBW.

        If these are the only frequency ranges for which parameter sets S1, S2, ... are
determined, a single parameter set S1 is determined for the frequency band FR1 and is
25   present in the portion P1, and a single parameter set S2 is determined for the frequency band
FR2 and is present in the portion P2. The quality scaling is possible by either using or not
using the portion P2.

        Fig. 5 shows another embodiment of the frequency ranges in accordance with
the invention. In this embodiment, the frequency band FR1 is again equal to the full
30   bandwidth FBW, and the sub-frequency bands FR2 and FR3 together cover the full
bandwidth FBW. Or said in other words, the frequency band FR1 is subdivided into the sub-
frequency bands FR2 and FR3.

        If these are the only frequency ranges for which parameter sets S1, S2, ... are
determined, the portion P1 comprises a single parameter set S1 determined for de frequency

band FR1, and the portion P2 comprises two parameter sets S2 and S3 determined for the frequency band FR2 and FR3, respectively. The quality scaling is possible by either using or not using the portion P2.

Fig. 6 shows the determination of the sets of parameters based on parameters in a previous frame in accordance with an embodiment of the invention.

Fig. 6 shows a data stream which comprises in each frame F1, F2, ... the coded information EIN which comprises the portion P1 which is part of the base layer BL and the portion P2 which forms the enhancement layer EL.

In the frame F1, the portion P1 comprises a single set of parameters S1 which are determined for the full bandwidth FR1. The portion P2, by way of example, comprises four sets of parameters S2, S3, S4, S5 which are determined for the sub-frequency bands FR2, FR3, FR4, FR5, respectively. The four sub-frequency bands FR2, FR3, FR4, FR5 subdivide the frequency band FR1.

In the frame F2 which succeeds the frame F1, the portion P1 comprises a single set of parameters S1' which are determined for the full bandwidth FR1 and are part of the base layer BL'. The portion P2 comprises four sets of parameters S2', S3', S4', S5' which are again determined for the sub-frequency bands FR2, FR3, FR4, FR5, respectively and which form the enhancement layer EL'.

It is possible to code each of the sets of parameters S1, S2, ... for each one of the frames F1, F2, ... separately. It is also possible to code the sets of parameters of the portion P2 with respect to the parameters of the portion P1. This is indicated by the arrows starting at S1 and ending at S2 to S5 in the frame F1. Of course this is also possible in the other frames F2, ... (not shown). In the same manner, it is possible to code the set of parameters S1' with respect to S1. And finally, the sets of parameters S2', S3', S4', S5' may be coded with respect to the sets of parameters S2, S3, S4, S5.

In this manner, the bit rate of the encoded information EIN can be reduced as the redundancy or correlation between sets of parameters Si is used.

Preferably, the new parameters of the new sets of parameters S1', S2', S3', S4', S5' are coded as the difference of their value and the value of the parameters of the previous sets of parameters S1, S2, S3, S4, S5.

At regular time intervals, at least the parameter set S1 has to be coded absolutely and not differential to prevent errors to propagate too long.

Fig. 7 shows a set of parameters. Each set of parameters Si may comprise one or more parameters. Usually the parameters are localization cues which provide information

about the localization of sound objects in the audio information. Usually the localization cues are the interaural level difference ILD, the interaural time or phase difference ITD or IPD, and the interaural cross-correlation IC. More detailed information on these parameters is provided in the Audio Engineering Society Convention Paper 5574 "Binaural Cue Coding

5   Applied to Stereo and Multi-channel Audio Compression" presented at the 112[th] Convention 2002 May 10-13 Munich, Germany, by Christof Faller et al.

Fig. 8 shows the differential determination of a parameter of the base layer. The horizontal axis indicates successive frames F1 to F5. The vertical axis shows the value PVG of a parameter of the set of parameters S1 of the base layer BL. This parameter has the

10   values A1 to A5 for the frames F1 to F5 respectively. The contribution of this parameter to the bit rate of the coded information EIN will decrease if not the actual values A2 to A5 of the parameter are coded but the smaller differences D1, D2 ,....

Fig. 9 shows the differential determination of the parameters corresponding to a frequency region of an enhancement layer. The horizontal axis indicates two successive

15   frames F1 and F2. The vertical axis indicates the values of a particular parameter of the base layer BL and the enhancement layer EL. In this example, the base layer BL comprises the portion P1 of information INF with a single set of parameters determined for the full frequency range FBW, the particular parameter of the portion P1 has the value A1 for the frame F1 and A2 for the frame F2. The enhancement layer EL comprises the portion P2 of

20   information INF with three sets of parameters determined for three respective frequency ranges FR2, FR3, FR4 which together fill the full frequency range FBW. The three particular parameters (for example, the parameter representing the ILD) have a value B11, B12, B13 in the frame F1 and a value B21, B22, B23 in the frame F2.

The contribution of these parameters to the bit rate of the coded information

25   EIN will decrease if not the actual values B11 to B23 of the particular parameter are coded but the differences D11, D12,..., because these differences can be encoded more efficiently than the actual values.

To summarize, in a preferred embodiment in accordance with the invention, it is proposed to organize the stereo parameter information INF such that a base layer BL

30   contains one set of parameters (preferably the time/level difference and the correlation) S1 which is determined for the full bandwidth FBW of the multi-channel audio signal LI, RI. The enhancement layer EL contains multiple sets of parameters S2, S3, ... which correspond to subsequent frequency intervals FR2, FR3, ... within the full bandwidth FBW. For bit-rate

efficiency, the sets of parameters S2, S3, … in the enhancement layer EL can be differentially encoded with respect to the set of parameters S1 in the base layer BL.

The information INF is encoded in a multi-layered manner to enable a scaling of the decoding quality versus bit rate.

5   To conclude, in the now following, an preferred embodiment in accordance with the invention is elucidated with respect to program code and its elucidation.

First, for all subframes (the portions P1, P2, …) in the frames F1, F2, … the data ESC for the monaural representation SC, the data EIN for the set of stereo parameters S1 for the full bandwidth FBW, and the stereo parameters S2, S3, … for the frequency bins (or

10   regions) FR2, FR3, … is determined.

The program code is shown at the left hand side, and an elucidation of the program code is provided under description at the right hand side.

code	description

```
15   {
          {
          for (f = 0; f < nrof_frames; f++)        for all frames do:
          {
                  example_mono_frame(f)             get data for monaural
20                                                  signal representation (the
                                                    portion A in Fig. 3)


                  example_stereo_extension_layer_1(f)   get data stereo parameters
                                                    full bandwidth (the
25                                                  portion P1)
                  example_stereo_extension_layer_2(f)   get data stereo parameters
                                                    frequency bins (the
                                                    portion P2)

          }
30   }
```

Secondly, depending on the value of the bit refresh_stereo the stereo parameters for the full bandwidth are coded absolutely (the actual value is coded) or the difference with previous values is coded. The following code is valid for the interaural level difference ILD.

```
        code                                        description

        example_stereo_extension_layer_1(f)

        {

5               refresh_stereo                       1 bit denoting whether or not data is to be
                                                     absolutely coded or not


                if (refresh_stereo == 1)             if data is to be coded absolutely

                {

10                      ild_global[f]                code the actual interaural intensity
                                                     difference(ild) for the whole frequency area
                                                     (global)

                }

                else                                 if not a refresh

15              {

                        ild_global_diff[f]           code ild with respect to the previous frame

                }

        }
```

Thirdly, depending on the value of the bit refresh_stereo the stereo parameters

20   for all of the frequency bins are coded absolutely (the actual value is coded) or the difference

with the corresponding parameters for the full bandwidth is coded. The following code is

valid for the interaural level difference ILD.

```
        code                                        description

25   example_stereo_extension_layer_2(f)

        {

                if(refresh_stereo==1)                if refresh

                {

                        for(b=0; b<nrof_bins; b++)   for all frequency bins

30                      {

                                ild_bin[f, b]        code the ild in that bin relative to the
                                                     global value

                        }

                }
```

```
        else                              if no refresh
        {
                for(b=0; b<nrof_bins; b++)   for all bins
                {
                ild_bin_diff[f, b]          code the ild within a particular bin
                                            relative to the value in that bin in the
                                            previous frame
                }
        }
}
```

Wherein:

The term "refresh_stereo" is a flag denoting whether or not the stereo parameters should be refreshed (0 = FALSE, 1 = TRUE).

The term "ild_global[sf]" represents the Huffman encoded absolute representation level of the ILD for the whole frequency area for frame f.

The term "ild_global_diff[f]" represents the Huffman encoded relative representation level of the ILD for the whole frequency area for frame f.

The term "ild_bin[f, b]" represents the Huffman encoded absolute representation level of the ILD for frame f and bin b.

The term "ild_bin_diff[f, b]" represents the Huffman encoded relative representation level of the ILD for frame f and bin b.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims.

Although the invention is elucidated in the Figs. with respect to a stereo signal, the extension to a more than two channel audio signal can easily be accomplished by the skilled person.

In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of elements or steps other than those listed in a claim. The invention can be implemented by means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In the device claim enumerating several means, several of these means can be embodied by one and the same item of hardware. The mere fact that certain

measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

In summary, multi-channel audio signals are coded into a monaural audio signal and information allowing to recover the multi-channel audio signal from the monaural audio signal and the information. The information is generated by determining a first portion of the information for a first frequency region of the multi-channel audio signal, and by determining a second portion of the information for a second frequency region of the multi-channel audio signal. The second frequency region is a portion of the first frequency region and thus is a sub-range of the first frequency region. The information is multi-layered enabling a scaling of the decoding quality versus bit rate.

16

CLAIMS:

1.   A method of encoding a multi-channel audio signal comprising at least two audio channels, the method comprising,

generating a single channel audio signal and encoding the single channel audio signal into a bit stream as an encoded single channel audio signal,

5   generating information from the at least two audio channels allowing to recover with a required quality level the multi-channel audio signal from the single channel audio signal and the information, the generating of the information comprising,

determining a first portion of the information for a first frequency region of the multi-channel audio signal, and encoding the first portion of the information into the bit

10   stream as an encoded first portion of the information, and

determining a second portion of the information for a second frequency region of the multi-channel audio signal, the second frequency region being a portion of the first frequency region, and encoding the second portion of the information into the bit stream as an encoded second portion of the information.

15

2.   A method of encoding a multi-channel audio signal comprising at least two audio channels, the method comprising,

generating a single channel audio signal,

generating information from the at least two audio channels allowing to

20   recover with a required quality level the multi-channel audio signal from the single channel audio signal and the information, the generating of the information comprising,

receiving a maximum allowable bit rate of the encoded multi-channel audio signal, and

only determining a first portion of the information for a first frequency region

25   of the multi-channel audio signal if a bit rate of the encoded multi-channel audio signal comprising the single channel audio signal and the first portion of the information is not higher than the maximum allowable bit rate.

3.   A method of encoding as claimed in claim 1 or 2, wherein the single channel
audio signal is a particular combination of the at least two audio channels.

4.   A method of encoding as claimed in claim 1, characterized in that the
information comprises sets of parameters, the first portion comprises at least a first one of the
sets of parameters, the second portion comprises at least a second one of the sets of
parameters, wherein each set of parameters is associated with a corresponding frequency
region.

5.   A method of encoding as claimed in claim 4, characterized in that the sets of
parameters comprise at least one localization cue.

6.   A method of encoding as claimed in claim 5, characterized in that the at least
one localization cue is selected from: an interaural level difference, an interaural time or
phase difference, or an interaural cross-correlation.

7.   A method of encoding as claimed in claim 1 or 2, characterized in that the first
frequency region covers a full bandwidth of the multi-channel audio signal.

8.   A method of encoding as claimed in claim 1, characterized in that the first
frequency region substantially covers a full bandwidth of the multi-channel audio signal, the
second frequency region covers a portion of the full bandwidth, and in that the determining of
the second portion of the information is adapted to determine sets of parameters for both the
second frequency region and a set of further frequency regions, the second frequency region
and the set of further frequency regions substantially covering the full bandwidth, where in
the set of further frequency regions comprises at least one further frequency region.

9.   A method of encoding as claimed in claim 8, characterized in that the single
channel audio signal and the first portion of the information form a base layer of information
which is always present in the encoded multi-channel audio signal, and in that the method
comprises receiving a maximum allowable bit rate of the encoded multi-channel audio signal,
the second portion of the information forming an enhancement layer of information which is
encoded only if the bit rate of the encoded base layer and enhancement layer is not higher
than the maximum allowable bit rate.

10.   A method of encoding as claimed in claim 4, characterized in that the
determining of the first portion of information in a particular frame of encoded information
comprises determining the first one of the sets of parameters in the particular frame, and

5   coding the first one of the sets of parameters based on the first one of the sets of parameters
of a frame preceding the particular frame.

11.   A method of encoding as claimed in claim 8, characterized in that the
determining of the second portion of information in a particular frame of the encoded

10   information comprises determining the sets of parameters of the second portion in the
particular frame and coding the sets of parameters of the second portion in the particular
frame based on the sets of parameters of a frame preceding the particular frame.

12.   A method of encoding as claimed in claim 8, characterized in that the

15   determining of the second portion of information in a particular frame of the encoded
information comprises determining the sets of parameters of the second portion in the
particular frame and coding the sets of parameters of the second portion in the particular
frame based on the first one of the sets of parameters of a frame preceding the particular
frame.

20

13.   A method of encoding as claimed in any one of the claims 10 to 12,
characterized in that the determining comprises calculating a difference between the
corresponding parameters in the particular frame and the frame preceding the particular
frame.

25

14.   An encoder for coding a multi-channel audio signal comprising at least two
audio channels, the encoder comprising:
              means for generating a single channel audio signal,
              means for generating information from the at least two audio channels

30   allowing to recover with a required quality level the multi-channel audio signal from the
single channel audio signal and the information, the generating of the information
comprising,
              means for determining a first portion of the information for a first frequency
region of the multi-channel audio signal, and

means for determining a second portion of the information for a second frequency region of the multi-channel audio signal, the second frequency region being a portion of the first frequency region.

5   15.   An encoder for encoding a multi-channel audio signal comprising at least two audio channels, the encoder comprising,

means for generating a single channel audio signal,

means for generating information from the at least two audio channels allowing to recover with a required quality level the multi-channel audio signal from the

10   single channel audio signal and the information, the generating of the information comprising,

means for receiving a maximum allowable bit rate of the encoded multi-channel audio signal, and

means for only determining a first portion of the information for a first

15   frequency region of the multi-channel audio signal if a bit rate of the encoded multi-channel audio signal comprising the single channel audio signal and the first portion of the information is not higher than the maximum allowable bit rate.

16.   An apparatus for supplying an audio signal, the apparatus comprising:

20   an input for receiving an audio signal,

an encoder as claimed in claim 14 or 15 for encoding the audio signal to obtain an encoded audio signal, and

an output for supplying the encoded audio signal.

25   17.   An encoded audio signal comprising:

a single channel audio signal,

information from the at least two audio channels allowing to recover with a required quality level the multi-channel audio signal from the single channel audio signal and the information, the information comprising,

30   a first portion of the information for a first frequency region of the multi-channel audio signal, and

a second portion of the information for a second frequency region of the multi-channel audio signal, the second frequency region being a portion of the first frequency region.

18.   A storage medium on which the encoded audio signal as claimed in claim 17 has been stored.

5   19.   A method of decoding a multi-channel audio signal being encoded as claimed in claim 17, the method of decoding comprising:

   obtaining a decoded single channel audio signal,

   obtaining decoded information from the information allowing to recover the multi-channel audio signal from the decoded single channel audio signal and the decoded

10   information, the decoded information comprises the first portion of the information and the second portion of the information, and

   applying either the first portion of the information or the first portion and the second portion of the information on the single channel audio signal to generate the decoded multi-channel audio signal.

15

   20.   A decoder for decoding an encoded audio signal, the decoder comprising:

   means for obtaining a decoded single channel audio signal,

   means for obtaining decoded information from the information allowing to recover the multi-channel audio signal from the decoded single channel audio signal and the

20   decoded information, the decoded information comprises the first portion of the information and the second portion of the information, and

   means for applying the first portion of the information and the second portion of the information on the single channel audio signal to generate the decoded multi-channel audio signal.

25

   21.   An apparatus for supplying a decoded audio signal, the apparatus comprising:

   an input for receiving an encoded audio signal,

   a decoder as claimed in claim 20 for decoding the encoded audio signal to obtain a multi-channel output signal, and

30   an output for supplying or reproducing the multi-channel output signal.

1/3

FIG. 1

FIG. 2

FIG. 3

FIG. 4


FIG. 5

2/3
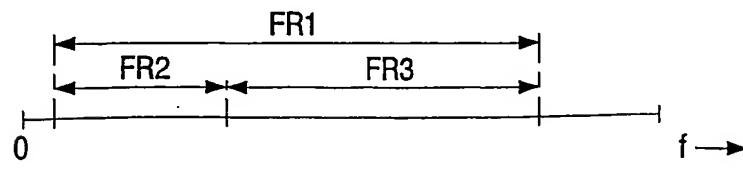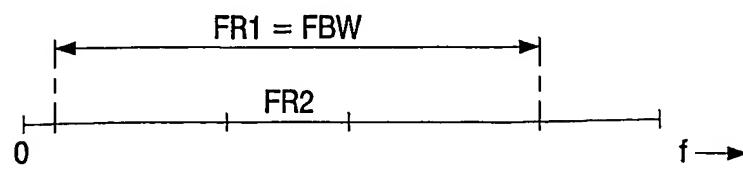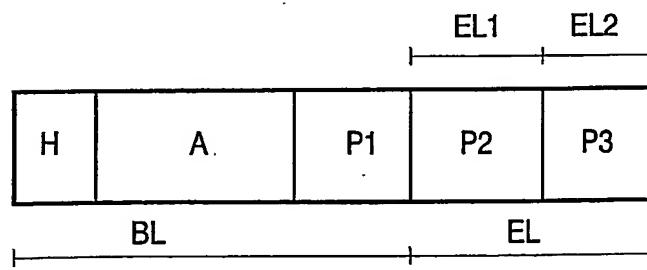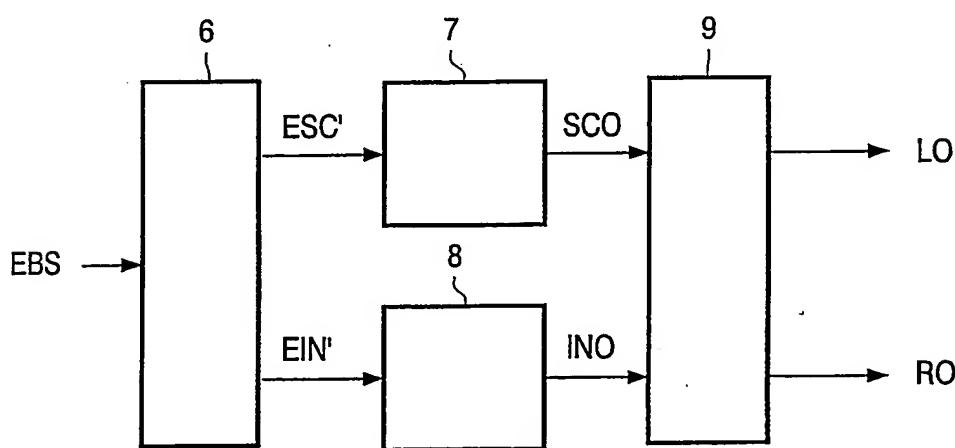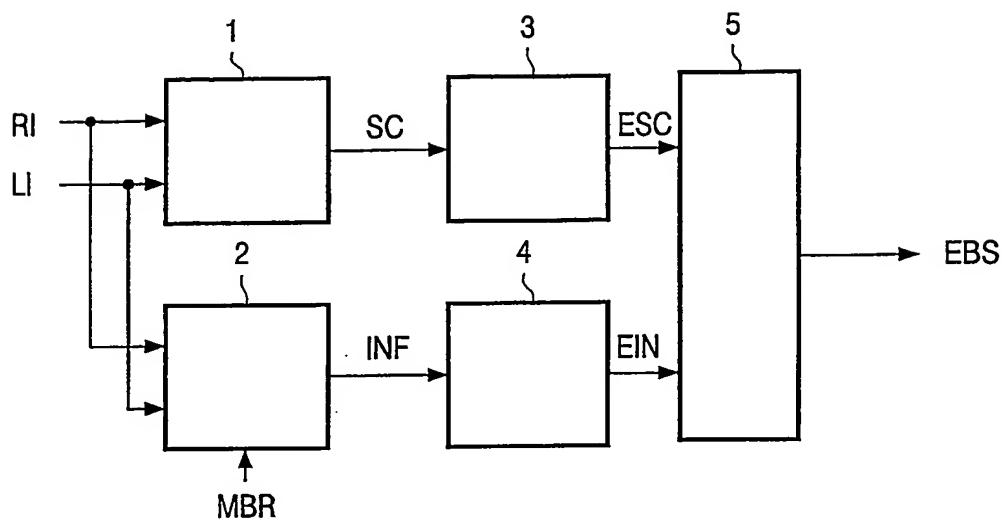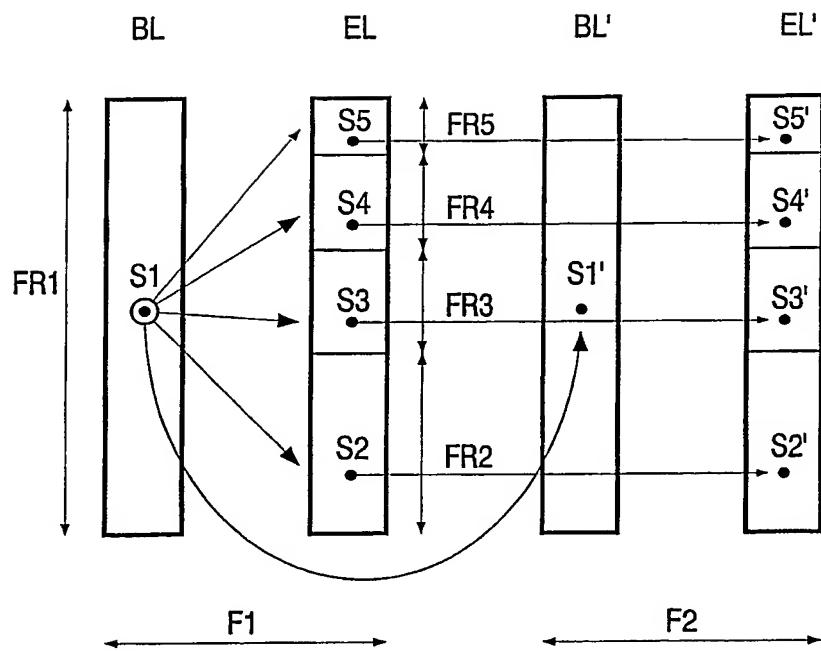
FIG. 6
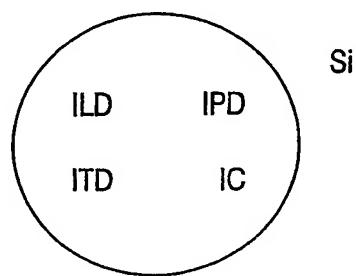
FIG. 7
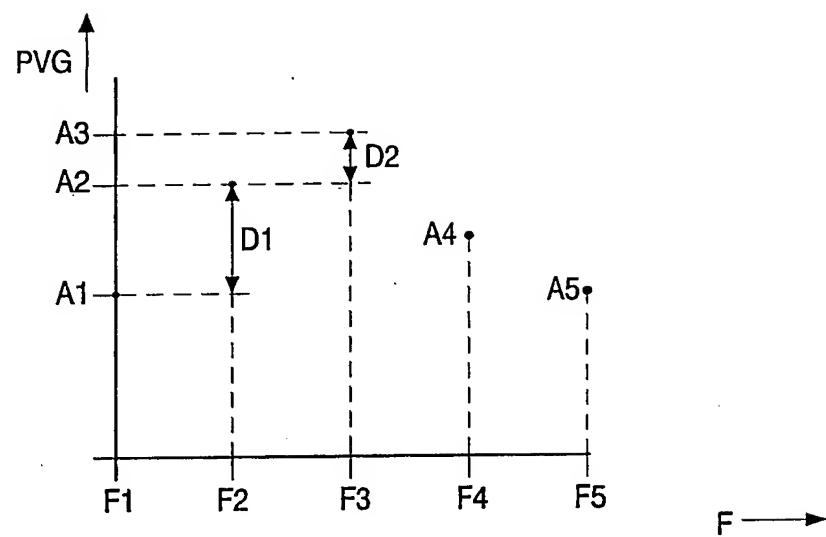
FIG. 8

FIG. 9

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7   G10L19/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7   G10L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data, INSPEC, IBM-TDB, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	VAN DER WAAL R G ET AL: "Subband coding of stereophonic digital audio signals" SPEECH PROCESSING 2, VLSI, UNDERWATER SIGNAL PROCESSING. TORONTO, MAY 14 – 17, 1991, INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH & SIGNAL PROCESSING. ICASSP, NEW YORK, IEEE, US, vol. 2 CONF. 16, 14 April 1991 (1991-04-14), pages 3601-3604, XP010043648 ISBN: 0-7803-0003-3 abstract page 3602, right-hand column, line 10 -page 3603, right-hand column, line 29 page 3604, left-hand column, line 29 -right-hand column, line 2	1-7,10, 13-21
A		8,9,11, 12

-/--

[X] Further documents are listed in the continuation of box C.   [X] Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
4 August 2003	11/08/2003

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Zimmermann, E

Form PCT/ISA/210 (second sheet) (July 1992)

International Application No

PCT/IB 03/01591

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	FALLER C ET AL: "Efficient representation of spatial audio using perceptual parametrization" IEEE WORKSHOP ON APPLICATIONS OF SIGNAL PROCESSING TO AUDIO AND ACOUSTICS, XX, XX, 21 October 2001 (2001-10-21), pages 199-202, XP002245584 abstract page 201, right-hand column, line 3 - line 22	1-21
A	BOSI M ET AL: "ISO/IEC MPEG-2 ADVANCED AUDIO CODING" JOURNAL OF THE AUDIO ENGINEERING SOCIETY, AUDIO ENGINEERING SOCIETY. NEW YORK, US, vol. 45, no. 10, 1 October 1997 (1997-10-01), pages 789-812, XP000730161 ISSN: 0004-7554 page 806, left-hand column, line 5 -right-hand column, line 41	1-21
A	EP 1 107 232 A (LUCENT TECHNOLOGIES INC) 13 June 2001 (2001-06-13) cited in the application abstract page 3, line 34 - line 53	1-21
A	US 5 890 125 A (DAVIS MARK FRANKLIN ET AL) 30 March 1999 (1999-03-30) abstract; figure 1 column 4, line 19 - line 33	1-21

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 1107232	A	13-06-2001	US	6539357 B1	25-03-2003
			CA	2326495 A1	03-06-2001
			EP	1107232 A2	13-06-2001
			JP	2001209399 A	03-08-2001
US 5890125	A	30-03-1999	AT	215295 T	15-04-2002
			AU	746416 B2	02-05-2002
			AU	8138098 A	10-02-1999
			CN	1264533 T	23-08-2000
			DE	69804478 D1	02-05-2002
			DE	69804478 T2	02-10-2002
			DK	1016320 T3	08-07-2002
			EP	1016320 A2	05-07-2000
			ES	2171031 T3	16-08-2002
			JP	2001510953 T	07-08-2001
			WO	9904498 A2	28-01-1999

Form PCT/ISA/210 (patent family annex) (July 1992)